

## Gaelic Weave Twist Pen Kit

### Instructions


#### Kit Features

- Click mechanism
- Parker™ style refills (RE-PARK)
- Overall length: 5-1/2"

#### Required Accessories & Materials

- 7mm mandrel
- 2-pc. Race Car bushing set (PKRACEBU)
- Drill bit – 3/8" (DB3/8)
- Universal trimming kit (BTRIMKIT9)
- Glue (We recommend the thick "gel" CA glue—GTHICK2)
- Sanding and finishing supplies

Diagram A - Parts and Assembly

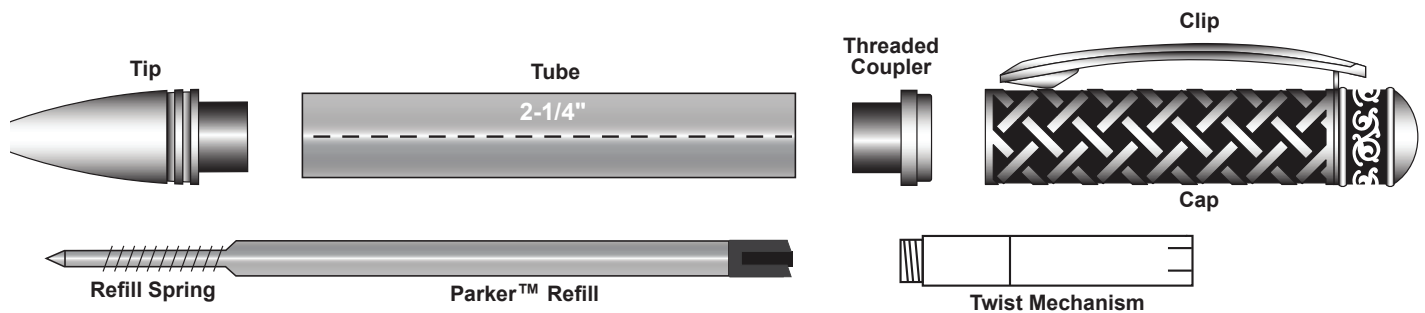

#### BLANK PREPARATION

The Gaelic Weave pen has a tube measuring 2-1/4". **Cut** your blank approximately 1/16" longer than the tube to allow for squaring with the barrel trimmer. Use a medium drill speed to **drill** the blank. Raise the bit from the blank every 1/4" to 1/2" to allow the chips to clear from the flutes of the drill bit. Don't force the drill bit; use an even pressure and let the bit do the work. After drilling the blank, **sand** the exterior of the brass tube to roughen its surface and use **CA glue** to glue the tube inside the blank. Sand or barrel trim to **square** the ends of the blank.

#### TURNING THE PEN

**Set up** the mandrel as shown in Diagram C. The Gaelic Weave pen's upper and lower bushings both have an outside diameter of .475" (see Diagram B). **Turn** the pen blank to the bushing diameter at the ends. **Sand** with abrasives and **finish** with your choice of polish.

#### ASSEMBLY

(Line up finished parts according to Diagram A)  
*To avoid damage to components when assembling, use a vise with covered jaws or one of WoodTurningz' pen presses.*

1. Press Tip onto the turned barrel.
2. Press the Threaded Coupler onto the opposite side of the turned barrel.
3. Drop the Refill with the spring through the Threaded Coupler.
4. Screw the Twist Mechanism into the Threaded Coupler.
5. Place the Clip/Cap over the Twist Mechanism.
6. The pen is now ready to operate.

Diagram B - Bushings




Diagram C - Turning the Pen

